










Parking Covers & Seals 1"-16"

Use this cover for:

- Seismic applications in parking and other areas with vehicular access.
- Available in standard or HS-20 heavy duty loading.
- New Cast-In-Place Model Available for post-tensioned slab applications.

For comprehensive information on these products, visit www.c-sgroup.com/expansion-joint-covers

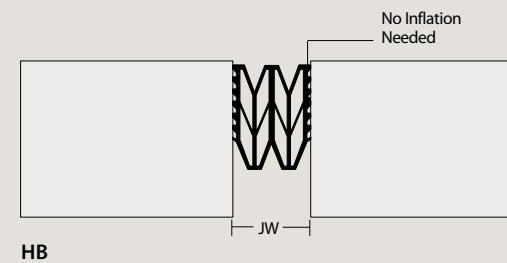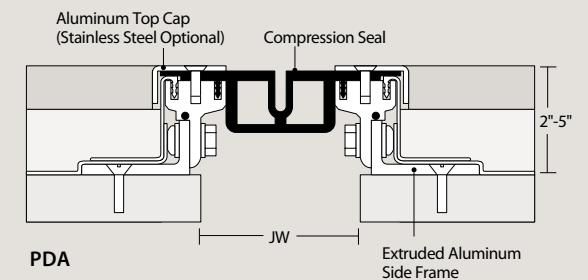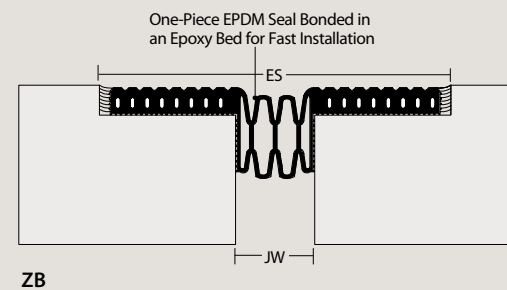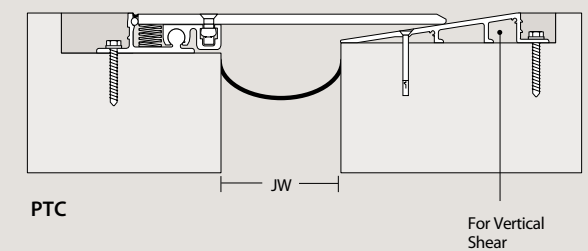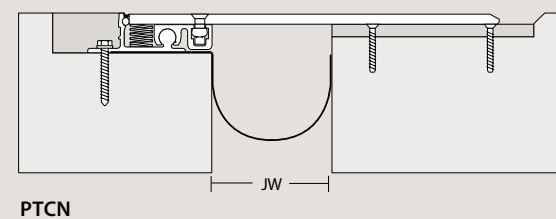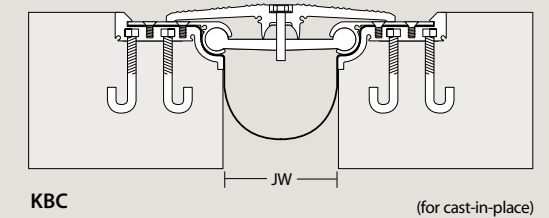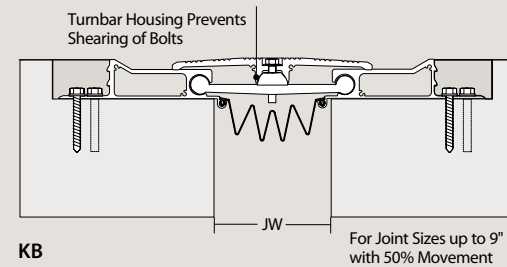

How it works:

C/S Zip Block one-piece EPDM parking seals provide multi-directional movement, and they install in half the time of elastomeric systems. C/S KB Metal Parking Cover offers a full range of movement including 1/2" of vertical displacement of slabs. Load dampening design eliminates loose covers. Call (800) 233-8493 for a complete catalog.

Model Data Floor to Floor Covers

| JOINT WIDTH | 4" | 6" | 8" | 6" | 8" | 10" | 12" | 14" | 16" |
|-----------------|--------|--------|--------|---------|---------|----------|----------|----------|----------|
| MINIMUM OPENING | 2.00" | 2.00" | 3.00" | 0.00" | 0.00" | 0.00" | 0.00" | 0.00" | 0.0" |
| MAXIMUM OPENING | 6.50" | 9.50" | 12.50" | 11.00" | 13.00" | 16.00" | 19.00" | 22.00" | 25.0" |
| EXPOSED SURFACE | 11.25" | 16.25" | 20.25" | 19.63" | 21.63" | 24.63" | 27.38" | 30.38" | 33.38" |
| SPECIFY MODEL | KB 400 | KB 600 | KB 800 | PTC 600 | PTC 800 | PTC 1000 | PTC 1200 | PTC 1400 | PTC 1600 |

Model Data Floor to Wall Covers

| | 4" | 6" | 8" |
|-----------------|--------|--------|--------|
| MINIMUM OPENING | 3.00" | 4.00" | 5.50" |
| MAXIMUM OPENING | 5.25" | 7.75" | 10.25" |
| EXPOSED SURFACE | 7.63" | 11.13" | 14.13" |
| SPECIFY MODEL | KBW400 | KBW600 | KBW800 |

Model Data Floor to Floor Covers

| JOINT WIDTH | 1.0" | 2.0" | 3.0" | 4.0" | 1.0" | 2.0" | 3.0" | 4.0" | 1.0" | 2.0" | 3.0" | 4.0" |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|---------|
| MINIMUM OPENING | 0.50" | 1.00" | 1.50" | 2.00" | 0.50" | 1.00" | 1.50" | 2.00" | 0.75" | 0.75" | 1.50" | 1.50" |
| MAXIMUM OPENING | 1.50" | 3.00" | 4.50" | 6.00" | 1.50" | 3.00" | 4.50" | 6.00" | 3.25" | 3.25" | 6.50" | 6.50" |
| EXPOSED SURFACE | 8.00" | 9.00" | 10.00" | 11.00" | 1.00" | 2.00" | 3.00" | 4.00" | 4.75" | 4.75" | 6.75" | 6.75" |
| SPECIFY MODEL | ZB 100 | ZB 200 | ZB 300 | ZB 400 | HB 100 | HB 200 | HB 300 | HB 400 | PDA-100 | PDA-200 | PDA-300 | PDA-400 |

For odd and larger sized joints, call (800) 233-8493 or visit www.c-sgroup.com